

# technical details

- 3 point cat 2, PTO shaft with freewheel, drive 1.000 rpm
- 2 knives per row free-cutting with 80m/s exact height
- height guidance by hydraulically adjustable wheels.

## model name

T-ED	0.8 m housing for single dam or one normal culture with a row spacing of 0.8 m to 1.3 m
T-DD	1.0 m housing for double dams with one Row spacing of 1.4-1.8 m
TS	with hydraulic swivel device for working in tunnels

model name	application area	total weight
T-ED	for central work	385 kg
T-DD	for central work double dam	410 kg
T2-ED	for central work 2 rows with a distance of 1.0 m	680 kg
T2-DD	for asymmetrical work 2 rows double dam, hydraulically foldable on one side	740 kg
T4-ED	for central work 4 rows foldable hydraulically	1450 kg
TS-ED 1,5m	can be swiveled by 1.5 m 1 row offset or centered	630 kg
TS-ED 2,0m	can be swiveled by 2.0m from the right row under that tug to the next but one row	810 kg
TS-DD 1,6m	can be swiveled by 1.6 m 1 row offset or centered double dam	640 kg
TS-DD 3,2m	can be swiveled by 3.2 m up to 2 rows offset / centered double dam	830 kg
TS2-ED 2,0m	can be swiveled by 2.0 m 2x 1 row offset or in the middle 1.0 m distance	890 kg

# goal of processing

- moving up and shredding old leaves
- cutting off leaves
- cutting down the stands after the harvest without damaging the foil
- cutting off the tendrils in late summe

# farming is you.

We are **4DISC** - a community of farmers, fruit growers and machine builders who solve typical problems in agriculture and fruit growing.

**We are happy to help!** Further information can be found at [www.4disc.de](http://www.4disc.de).

# 4DISC

4 Disc GmbH  
Bönninghauser Str. 5  
44329 Dortmund


+49 231 986 923 22  
4disc@4disc.de  
[www.4disc.de](http://www.4disc.de)

# 4DISC TOPPER

10/2021

The innovative  
cutting device

For every job:  
**our topper  
variant variety!**

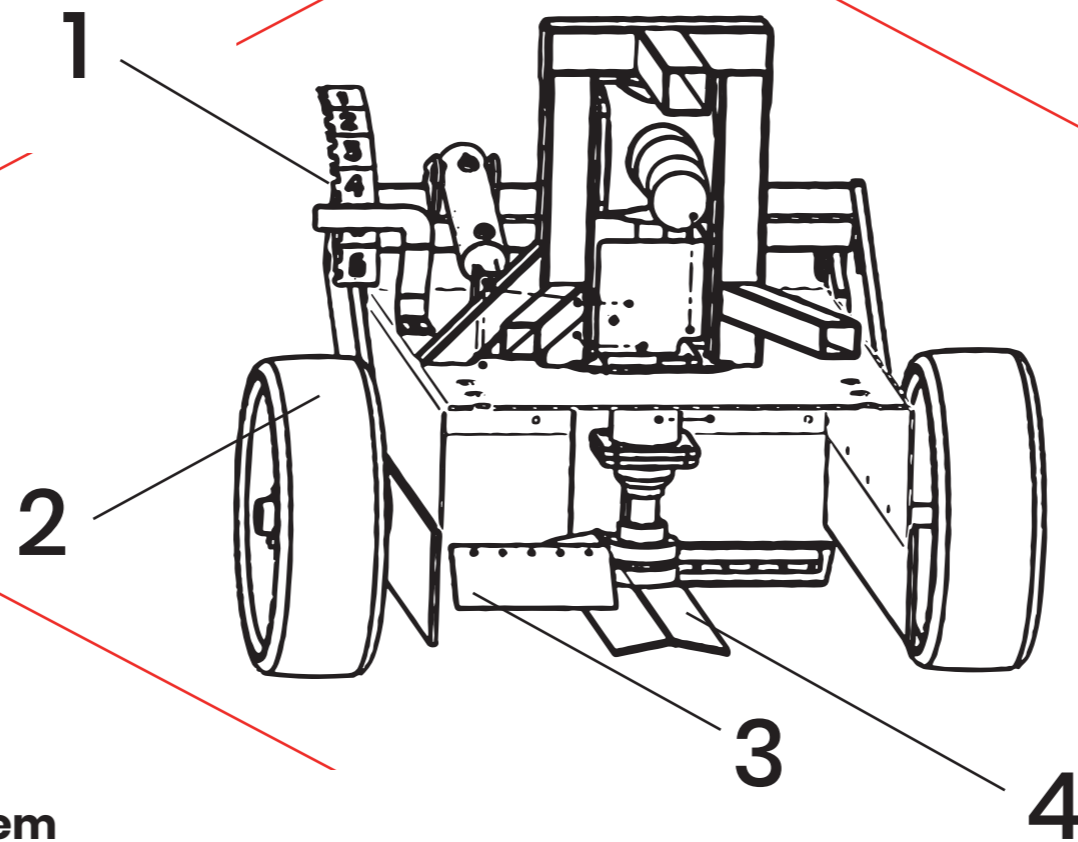

### system in detail

- 1** The integrated scale is used to set and check the cutting height.
- 2** The large wheels at the height of the rotor ensure optimum height control and first-class function. They are hydraulically adjustable.
- 3** Free-cutting knives with a steep angle create suction and lift the material. They cut off all overhanging material at 2000 1/min (80 m/s).
- 4** The reflector plate can be additionally installed to protect the new young leaves when cutting off the tendrils in late summer.



**4DISC**  
TOPPER