technical details

- 3 point cat 2
- hydraulic drive of the knives, oil consumption from 25 liters per row
- exact height guidance by adjustable feeler wheels
- free swinging housing universal suitable for single and double dams
- optionally with own on-board hydraulics
- optionally with swivel arm for staggered working in the foil tunnel

model name	application area	total weight
R-ED/DD	single row	290 kg
R2-ED	two rows	410 kg
R3-ED	three rows suitable for narrow wheeltrack	520 kg
RK4-ED	four-row hydraulic folding without own oil supply	700 kg
RK4-ED	four-row hydraulic folding with own oil supply	810 kg

optionally with swivel arm

1,6 m swivel range offset	130 kg extra weight for
by one row	R–ED and R–DD
2,0 m swivel range offset	150 kg extra weight for
by two rows	R-ED and R2-ED
3,2 m swivel range offset by several rows	200 kg extra weight for R-DD

goal of processing

- Suction and cutting of tendrils on the embankment flank
- Targeted shortening of the lateral leaf mass
- Reduction of wage labor costs

farming is you.

We are **4DISC** - a community of farmers, fruit growers and machine builders who solve typical problems in agriculture and fruit growing.

We are happy to help! Further information can be found at www.4disc.de.

4DISC

4 Disc GmbH Bönninghauser Str. 5 44329 Dortmund

J +49 231 986 923 22

✓ 4disc@4disc.de www.4disc.de •)))






The innovative

tendril cutter

Remove tendrils economically and effectively.



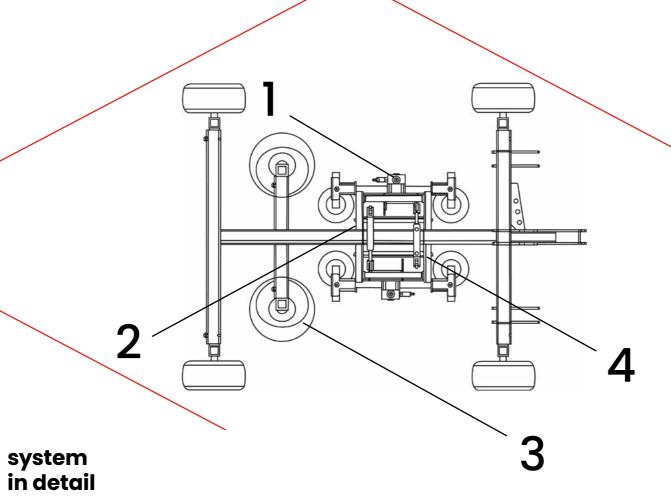

The blades are guided parallel to the dam flank and safely cut off the tendrils.

Housing suspended in pendulum fashion, ensuring exact adaptation to a wide variety of dam shapes.

Pulled base frame with feeler wheels guides itself along the strawberry dam.

Hydraulically swing-out housings for safe retraction and extension at the field ends.

